



ENG

6615790A1
09/2016

NEW

4D Series

60 - 70 - 75 - 80



Landini



New **4D Series**



Specially developed to replace the Technofarm tractor family, the 4D Series is a new range of sturdy, simple tractors designed to deliver new levels of performance.

The 4D Series incorporates advanced technical solutions that minimise operating costs while providing a perfect combination of ruggedness and reliability, making this tractor ideal for field tasks, haymaking and transport operations.

Supplied in both two- and four-wheel drive configurations, the 4D is currently offered as an open-platform; a cab version is slated to become available in future. The range features two different engine options: Perkins Tier3 for the 4-075D model and Deutz Tier4 Final for the 4-060D, 4-070D and 4-080D models. The engine hood has been redesigned to reflect the new Landini family styling.

Specially developed by Argo Tractors, the versatile Speed Four modular transmission with synchro shuttle offers four synchronized gears in three ranges providing 12 forward and 12 reverse speeds. A creep speed unit with 16 forward and 16 reverse gears and speeds as low as 300 m/h is available as an option.

The 4WD version with electrohydraulic engagement of the four-wheel drive features a mechanical differential lock on the rear axle and a limited slip differential on the front axle. When the hydrostatic annular-piston rear brakes are operated, the four-wheel drive engages automatically, which in turn brakes the front axle for efficient braking on all four wheels.

The open-centre hydraulic system delivers a flow rate of 45 l/min to operate the hitch and two remote valves. The rear hitch with one assistor ram offers a maximum lift capacity of 3400 kg and can be optionally equipped with Ergonomic Lift System for more comfortable implement operation.

The 4D tractors come with a mechanically-operated PTO offering a choice of one or two speeds in addition to the ground speed for maximum versatility of use.

Located on an iso-mounted platform, the driving position features an adjustable steering wheel and ergonomically-positioned gear levers for maximum operator comfort. A rear folding ROPS and large, wrap-around fenders ensure maximum protection for the operator.

The 4D Series will surprise you with its simple design and its ergonomic comfort.





KEY FEATURES & BENEFITS

- › ENGINES MEETING TIER4 FINAL EMISSIONS REGULATION
- › EXHAUST GAS RECIRCULATION SYSTEM (EGR) WITH DIESEL OXIDATION CATALYST (DOC)
- › 4-CYLINDER TURBOCHARGED INTERCOOLED ENGINE WITH ELECTRONIC COMMON RAIL INJECTION SYSTEM
- › SIMPLE ENGINE MAINTENANCE AND EASY-TO-CLEAN COOLERS
- › 12/12 SPEED FOUR TRANSMISSION WITH SYNCHRO SHUTTLE
- › FRONT 4WD AXLE WITH ELECTROHYDRAULIC ENGAGEMENT

NEW DEUTZ C4DT SERIES ENGINES

Three models in the range are powered by the new Deutz C4DT four-cylinder turbo-intercooled engines with two-valve technology and electronic high-pressure common rail injection system.

The efficient Deutz injection system provides more power, higher torque backup and better fuel economy, resulting in great flexibility of use. An innovative exhaust gas recirculation system (EGR) with diesel oxidation catalyst (DOC) allows these engines to meet the Tier 4 Final emissions regulation without the use of a diesel particulate filter (DPF), thus eliminating

the need for a regeneration process. The Deutz engines powering the 4D Series have a 2.9L displacement and deliver maximum power outputs of 64, 69 and 76 hp. The fourth model in the range is powered by a Perkins naturally aspirated 4.4-liter 4-cylinder Tier 3 engine delivering 74 hp to offer farmers a more cost-effective option. Fully redesigned to reflect the new Landini family styling, the hood opens wide to provide easy access to the engine compartment for routine service and maintenance and to allow easy cleaning of coolers in dusty conditions (fig. A)



FRONT AXLE WITH 55° STEERING ANGLE

The front axle with electro-hydraulic four-wheel drive engagement offers a 55-degree steering angle ensuring excellent ground clearance and optimum manoeuvrability in confined spaces (fig. B). Featuring a limited slip differential lock, the front axle provides maximum traction even in the toughest ground conditions.



New 4D Series



SPEED FOUR MECHANICAL TRANSMISSION

The 4D Series tractors feature a versatile Speed Four modular transmission with four synchronized gears in three ranges and synchro shuttle offering 12 forward and 12 reverse speeds. The gearbox is offered in a 30 km/h version on the 2WD models and in a 40 km/h version on the 4WD models. The creep speed unit, standard on the 2WD models and optional on the 4WD models, provides 16 forward and 16 reverse gears and speeds as low as 300 m/h. The gear and range levers are located on the driver's right-hand side, while the shuttle lever is on the left-hand side. All controls are ergonomically-designed and logically-arranged for maximum comfort and ease of operation (fig. C-D).



INSTRUMENT PANEL AND STEERING WHEEL

Stylish and well lighted, the analog instrument panel tilts with the steering wheel, allowing the driver to constantly monitor the tractor operation. The angle adjustment is done via a foot pedal conveniently located under the dashboard (fig. E).





KEY FEATURES & BENEFITS

- › DRIVING POSITION ON ISO-MOUNTED PLATFORM
- › FULLY ADJUSTABLE STEERING WHEEL AND LOGICALLY-ARRANGED ERGONOMIC CONTROL LEVERS
- › ONE- OR TWO-SPEED PTO WITH MANUAL CLUTCH FOR SMOOTH AND MODULATED IMPLEMENT START-UP
- › MECHANICAL REAR HITCH WITH UP TO 3400 KG LIFT CAPACITY
- › ERGONOMIC LIFT SYSTEM FOR MORE CONVENIENT IMPLEMENT OPERATION
- › TWO MECHANICAL REMOTE VALVES FOR IMPLEMENT HYDRAULIC FUNCTIONS




POWERFUL HYDRAULIC SYSTEM FOR HITCH AND REMOTE VALVES

The hydraulic system with double pump has a total flow of 65 l/min and supplies 45 l/min to the hitch and 20 l/min to the steering system.

The three-point hitch Category II includes position, draft, mixed and float controls and can lift up to 3400 kg with one optional assistor ram. For more convenient implement operation, the rear hitch can be optionally equipped with Ergonomic Lift System (fig. F-G).

The system comes standard with two remote valves controlled by levers located on the driver's right-hand side. The high-quality quick-release couplings, mounted on the rear of the tractor, are easily accessible for convenient and fast operation (fig. H-I).

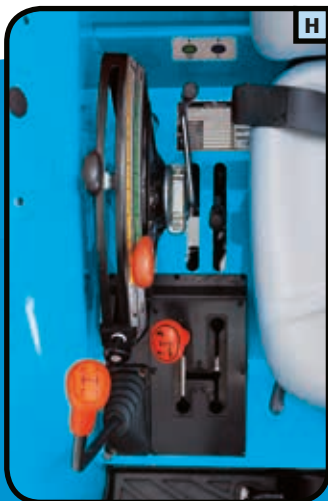



ROOMY AND COMFORTABLE DRIVING POSITION

Located on an iso-mounted platform, the driving position of the 4D series tractor features large wrap-around fenders and is equipped with a fully adjustable sprung seat. The hydraulic steering, the adjustable steering wheel and the gear levers ergonomically arranged on the driver's side maximise the ride comfort. The two-post ROPS can be optionally equipped with a sun canopy. (Fig. L).

POWER TAKE-OFF WITH LEVER-OPERATED CLUTCH

Mechanically-operated by a lever, the clutch enables smooth and modulated engagement of the PTO, ensuring a soft start-up of the implement. The 1 3/8-inch rear PTO come standard with two speeds 540/540E rpm in addition to the ground speed. A 540-rpm PTO and a 540/1000-rpm PTO are also available on request for maximum versatility of use (fig. M).



		4-060D	4-070D	4-075D	4-080D
ENGINE					
TYPE		DEUTZ C4DT45 TIER4 FINAL	DEUTZ C4DT50 TIER4 FINAL	PERKINS 1104D-44 TIER3	DEUTZ C4DT55 TIER4 FINAL
MAX. POWER ISO	HP/KW	64 / 47	69.5 / 51	74 / 54.5	76 / 56
RATED POWER ISO	HP/KW	61 / 45	68 / 50	74 / 54.5	75 / 55
RATED SPEED	RPM	2200	2200	2200	2200
MAX. TORQUE	NM	244	271	261	300
MAX. TORQUE SPEED	RPM	1600	1600	1400	1600
BORE / STROKE	MM	92x110	92x110	105x127	92x110
DISPLACEMENT / NO. OF CYLINDERS	CM ³	2900 / 4 TA	2900 / 4 TA	4400 / 4	2900 / 4 TA
COMPRESSION RATIO		17.2:1	17.2:1	18.2:1	17.2:1
WATER COOLING		●	●	●	●
AIR FILTER		DRY	DRY	DRY	DRY
FUEL TANK CAPACITY	L	75	75	75	75
CLUTCH					
INDEPENDENT DRY DUAL CLUTCH	INCH (MM)	11 (280)	11 (280)	11 (280)	11 (280)
MECHANICAL CONTROL		●	●	●	●
TRANSMISSION					
SYNCHRO SHUTTLE + SPEED FOUR + CREEPER: 16FWD+16REV 30KM/H (2WD VERSION)		●	●	●	●
SYNCHRO SHUTTLE + SPEED FOUR: 12FWD+12REV 40 KM/H		●	●	●	●
SYNCHRO SHUTTLE + SPEED FOUR + CREEPER: 16FWD+16REV 40 KM/H		○	○	○	○
MECHANICAL REAR DIFFERENTIAL LOCK		●	●	●	●
POWER TAKE-OFF					
MECHANICAL CONTROL		●	●	●	●
1 SPEED: 540 RPM		○	○	○	○
2 SPEEDS: 540/1000 RPM		○	○	○	○
2 SPEEDS: 540/540E RPM		●	●	●	●
GROUND SPEED PTO		●	●	●	●
FRONT 4WD AXLE					
ELECTROHYDRAULIC 4WD ENGAGEMENT		●	●	●	●
MAX. STEERING ANGLE		55°	55°	55°	55°
LIMITED SLIP DIFFERENTIAL LOCK		●	●	●	●
BRAKES					
HYDROSTATICALLY-OPERATED ANNULAR-PISTON REAR BRAKES		●	●	●	●
AUTOMATIC 4WD ENGAGEMENT ON BRAKING		●	●	●	●
HYDRAULIC POWER LIFT					
DRAFT AND POSITION CONTROL		●	●	●	●
MECHANICAL CONTROL		●	●	●	●
ERGONOMIC LIFT SYSTEM		○	○	○	○
STANDARD LIFT CAPACITY	KG	2700	2700	2700	2700
LIFT CAPACITY WITH 1 ASSISTOR RAM	KG	3400	3400	3400	3400
HYDRAULIC FLOW (HITCH + STEERING)	L/MIN	45 + 20	45 + 20	45 + 20	45 + 20
THREE-POINT LINKAGE		CAT. 2	CAT. 2	CAT. 2	CAT. 2
REMOTE VALVES STD / OPT		1 / 2	1 / 2	1 / 2	1 / 2
DRIVING POSITION					
ISO-MOUNTED PLATFORM		●	●	●	●
SPRUNG SEAT		●	●	●	●
ADJUSTABLE STEERING WHEEL		●	●	●	●
ANALOG INSTRUMENT PANEL		●	●	●	●
REAR FOLDING ROPS		●	●	●	●
WEIGHTS AND DIMENSIONS (IN RUNNING ORDER)					
A - TOTAL LENGTH WITHOUT BALLAST WEIGHTS	MM	3930	3930	3930	3930
B - MINIMUM WIDTH	MM	1650 WITH 12.4R36	1650 WITH 12.4R36	1650 WITH 12.4R36	1650 WITH 12.4R36
C - WHEELBASE	MM	2164	2164	2164	2164
D - HEIGHT TO STEERING WHEEL	MM	1620	1620	1620	1620
E - GROUND CLEARANCE	MM	450	450	450	450
F - HEIGHT TO ROPS	MM	2500	2500	2500	2500
TOTAL WEIGHT WITHOUT BALLAST WEIGHTS	KG	2800	2800	2800	2800

Key: ● standard ○ option – not available

